

09-18-00

A

PATENT APPLICATION

Assistant Commissioner for Patents
 Box **Patent Application**
 Washington, D. C. 20231

Sir:

Enclosed herewith for filing is the following utility patent application

Applicant(s): **Arnold V. Kholodenko et al.**

Title of application: **HIGH TEMPERATURE ELECTRICAL CONNECTOR**

Pages of specification: **16** (including 5 pages of claims and 1 page Abstract)

Sheets of drawings: **4**

Executed on: 9-15-2000 Docket No.: 4117/ETCH/CORETECH/JB1

PATENT APPLICATION FILING FEE CALCULATION

| | <u>No. Filed</u> | <u>Less</u> | <u>Rate/Claim</u> | <u>Fee</u> |
|--|------------------|-------------|-------------------|--------------------------|
| Total Claims | 44 | -20 | 24 x \$18.00 | \$432.00 |
| Independent Claims | 2 | -3 | 0 x \$78.00 | \$000.00 |
| Minimum Filing Fee | | | | \$690.00 |
| Multiple Dependency Fee (if applicable - \$260.00) | | | | \$000.00 |
| 50% Reduction for Small Entity (Independent Inventor, Non-profit Corporation, or Small Business Concern) - appropriate verified statement attached | | | | - \$000.00 |
| TOTAL FILING FEE | | | | <u>\$1,122.00</u> |

Kindly charge the entire and/or any additional filing fee, as appropriate, to deposit account number 50-1074. To facilitate that charge, a duplicate copy of this letter is enclosed herewith.

Kindly send all correspondence relating to this application to the following address:

JC564 U.S. PTO
 09/663864
 09/15/00

09/15/00
 JC530 U.S. PTO

09663864-091500


Patent Counsel
Applied Materials, Inc.
3050 Bowers Avenue
P.O. Box 450A
Santa Clara, CA 95052

Also enclosed herewith for filing in connection with the enclosed application are:

- ____ Oath;
- ____ A copy of the executed Declaration;
- ____ A copy of the specification of the prior application serial no. _____;
- ____ Disclosure Statement;
- ____ Letter referencing previously filed disclosure document; number _____ filed _____;
- ____ Verified Statement claiming small entity status;
- ____ An assignment of the application to: Applied Materials, Inc. with Recordation Form Cover Sheet _____;
- ____ Claim(s) to priority under 35 U.S.C. § 120:
 Serial Number Filing date
- ____ A certified copy of a _____ application or inventor's certificate, filed _____ and serial no. _____, upon which a claim to priority is made;
- ____ Other: _____

Respectfully submitted,

9/15/2000

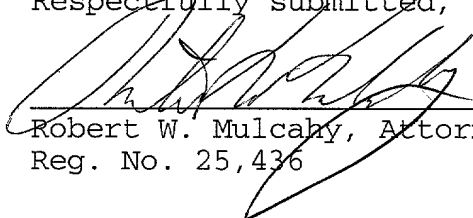
Robert W. Mulcahy, Attorney
Reg. No. 25,436

005160-49889950

EXPRESS MAIL CERTIFICATION

"Express Mail" mailing label number: EL35691535145
Date of deposit: 9-15-2000

I hereby certify that this patent application and related papers is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Beth Mucca
Signature of person mailing paper or fee

BETH MUCCA
Name of person mailing paper or fee

009160"432E9350

HIGH TEMPERATURE ELECTRICAL CONNECTOR**BACKGROUND OF THE INVENTION****1. Field of the Invention**

5 This invention relates to electrostatic chucks for retaining a semiconductor wafer in a semiconductor wafer processing system and, more specifically, to connectors for connecting power to an electrode embedded in a chuck.

2. Description of the Background Art

10 Numerous electrostatic chucks are known to the art for retaining a semiconductor wafer within a process chamber of a semiconductor wafer processing system. A semiconductor wafer processing system is disclosed in U.S. Patent No. 4,842,683 entitled MAGNETIC FIELD-ENHANCED PLASMA ETCH
15 REACTOR, David Cheng et al issued June 27, 1989, and assigned to the same assignee as the present application, Applied Materials, Inc., of Santa Clara, CA. This patent is incorporated herein by reference as if fully reproduced herein.

20 Specifically, the chuck 10 includes a chuck body 12 of ceramic material, such as for example aluminum nitride, and further includes an electrode 14 embedded in the chuck body 12, near the top portion thereof. The embedded electrode 14 may be, for example, a molybdenum mesh electrode. The
25 electrode 14 is coupled to a power supply through an electrical coupler 16. The electrical coupler 16 includes a male connector member 18 and a female connector member 20, typically fabricated from molybdenum and beryllium copper, respectively. The chuck 10 is attached to a cooling plate 22
30 suitably mounted to the bottom of the chuck body 12 such as for example by a suitable adhesive or by suitable bolts not shown. The cooling plate 22 may be made, for example, of stainless steel or aluminum and is provided with a plurality of cooling channels 21 for carrying a liquid coolant for
35 cooling the chuck 10. The male connector member 18 includes an upper solid cylindrical portion 24 extending through a bore 25 formed in the chuck body 12 and an integrally formed lower solid cylindrical portion 26 extending through a bore

005160-4989960

27 formed in the cooling plate 22. Lower cylindrical portion
26 has a smaller diameter than the upper cylindrical portion
24. The female connector member 20 is provided with an
inwardly extending upper cylindrical bore 28 forming a
5 collet 29. The cylindrical bore 28 and collet 29 receive the
lower cylindrical portion 26 of the male connector member 18
along path 37, thereby mechanically and electrically
interconnecting the male and female connector members 18 and
20 together. The female connector member 20 is fixed within
10 an insulator portion 11 of a pedestal base (not shown). The
bottom of the female connector member 20 is connected to a
source of RF biasing power 30 and a source of DC chucking
voltage 32 by a connector 34 and a conductor 35.

Certain semiconductor wafer processes require that the
15 chuck operate at a relatively elevated temperature, for
example, from about 200°C to about 500°C. Accordingly, the
temperatures of the male and female connector members 18 are
increased in the same temperature range with little
reduction in temperature. Such components, especially the
20 lower portion of the female connector member 20, which is
coupled to the electrical connector 34 and conductor 35 for
applying the RF and DC biasing voltage, must be able to
withstand these operating temperatures. An undesirable
outcome of operating a chamber at such elevated temperatures
25 is an increase in the costs for manufacturing the connector
and conductor, since they are generally not commercially
available.

Accordingly, there is a need in the semiconductor wafer
chuck art for a chuck that is operated at a relatively high
30 temperature in the range noted above. Furthermore, there is
a need for a connector for applying the DC chucking voltage
and the RF biasing power to the chuck electrode, which
includes thermal impedance that assists in reducing the heat
transferred between the top portion of the connector and the
35 bottom portion of the connector. Additionally, there is a
need for a connector that will not be subjected to the
detrimental effects of plasma that may form between the male

005150-498E9960

and female portions of the connector or any other surface area, having a different voltage potential than the top portion of the connector.

5

SUMMARY OF THE INVENTION

An electrical coupler comprises an inner connector having upper and lower ends, the insulative outer connector element circumscribing the inner connector, and a thermally conductive flange disposed over the upper end of the inner
10 connector and the outer connector for conducting heat from the electrical conductor.

In another aspect, a support assembly for supporting a semiconductor wafer comprises a chuck body having at least one electrode embedded therein, and a cooling plate
15 positioned beneath the chuck body. An electrical coupler is positioned within the cooling plate and has a thermally conductive flange circumscribing the electrical coupler and disposed upon a surface of the cooling plate.

20

DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 is a vertical elevational view, generally in
25 cross-section, of a prior art semiconductor wafer chuck and connector;

FIG. 2 is a partially exploded elevation view, in cross-section, of a semiconductor wafer support and connector of the present invention;

30 FIG. 3A is a detailed elevated cross-sectional view of an electrical coupler 230 shown in FIG. 2;

FIG. 3B is a detailed view of the circled portion of the electrical coupler shown in FIG. 3A; and

35 FIG. 4 depicts a top view of the electrical coupler.
To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

005160-1985950

DETAILED DESCRIPTION

FIG. 2 depicts a semiconductor wafer support 200 having an electrical coupler in accordance with the present invention. In particular, the semiconductor wafer support 200 comprises a chuck 220 coupled to a cooling plate 167 having an electrical coupler 230, and a power source 28. A workpiece such as a semiconductor wafer (i.e., substrate) is disposed upon an upper surface of the chuck 220. The wafer (not shown) is chucked and biased by an electrode 73 coupled to the power source 28 via the electrical coupler 230. Additionally, the preferred embodiment inventively utilizes a thermally conductive flange 202 (to be discussed in detail) for transferring heat from the electrical coupler 230 to the cooling plate 167. A semiconductor wafer processing system is disclosed in U.S. Patent Application Serial No. 09/212,000 entitled CONNECTORS FOR AN ELEETROSTATIC CHUCK AND COMBINATION THEREOF, by Shamoulian et al., filed December 14, 1998 and assigned to the same assignee as the present application, Applied Materials, Inc., of Santa Clara, CA. This patent application is incorporated herein by reference as if fully reproduced herein.

Specifically, the chuck 220 comprises a chuck body 162 having the electrode 73 embedded therein and an upper male connector 231 coupled to the electrode 73 via a chuck electrode connector 165. The electrode connector 165 resides in a centrally formed, generally cylindrical bore 168 extending upwardly into the chuck body 162 and opening to the electrode 73. In a preferred embodiment, the electrode connector 165 is mechanically and electrically connected to the electrode 73 by brazing, although other electrically conductive techniques may be used.

The chuck body 162 may be a ceramic material such as aluminum nitride, the electrode 73 may be a molybdenum mesh electrode, and the electrode connector 165 may be a molybdenum electrode connector plated with an electrically

conductive material for conducting RF biasing power to the
embedded electrode 73. Such plating material may be selected
from the group comprising silver, gold, aluminum, nickel,
copper, and any combination of metals thereof. A person
5 skilled in the art will recognize that other ceramic
materials may be used to fabricate the chuck body 162 such
as boron nitride and the like. Furthermore, other materials
may be used to fabricate the electrode 73, such as _____,
and the like, as well as configuring the electrode 73 in
10 concentric circles, a coil shape, zoned configurations, and
the like.

The upper male connector 231 is a solid, generally
cylindrical connector member fabricated from a thermally
non-conductive metal such as _____ and the like. In the
15 preferred embodiment, the upper male connector 231 is
stainless steel. At the top of the upper male connector 231
is an integrally formed threaded projection 185 for
threadedly engaging the internal threads provided in the
bore 186 of the electrode connector 165 to mechanically and
20 electrically interconnect the upper male connector 231 to
the embedded electrode 73. In particular, at the top of the
upper male connector 231 is a radially extending portion 187
that serves as a conductive RF path as between the upper
male connector 231 and the electrode connector 165. The
25 conductive RF path is formed after the threaded projection
185 is threaded into the bore 186 of the electrode connector
165 so that the radially extending portion 187 is flush
against the electrode connector 165. Thus, the conductive RF
path follows along the upper male connector 231, through the
30 radially extending portion 187 to electrode connector 165,
and then to the electrode 73. However, one skilled in the
art will recognize that the chuck body 162, the chuck
electrode connector 165, and the upper male electrode
connector 231 may be coupled in any other manner suitable
35 for rigidly securing each component together and providing
an RF conductive path.

The upper male connector 231 is generally conical or

005160-198E9960

005150 19859960

tapered bottom or distal end 189. Moreover, the upper male connector 231 may be plated with electrically conductive material or successive layers of conductive materials such as aluminum, copper, silver, gold, and nickel. In the preferred embodiment, the plating is a successive layer of nickel, copper, nickel, and gold. In particular, the plating is performed to enhance RF current conduction, reduce the susceptibility to corrosion, minimize magnetic susceptibility, and minimize contact resistance between the upper male connector 231 and its female counterpart of the electrical coupler 230.

The cooling plate 167 is provided with a centrally formed generally cylindrical bore 167a whose top portion is provided with a counter bore 167b. A bottom of the counter bore 167b defines an annular mounting surface 167c for mounting an upper portion 232 of the electrical coupler 230. The electrical coupler 230 is inserted into the cylindrical bore 167a such that the upper portion 232 is affixed to the annular mounting surface 167c, for example, by suitable bolts 202d or by a suitable adhesive (not shown). Additionally, the cooling plate 167 may be fabricated from aluminum and is provided with a plurality of cooling channels 81 for receiving a suitable coolant fluid for cooling the chuck 220.

The electrode 73 that is embedded in the chuck 220 is electrically coupled to the chucking and biasing power sources 32 and 30, via the electrical coupler 230. Specifically, the upper male connector 231 is inserted into the upper portion 232 of the electrical coupler 230 disposed in the cooling plate 167, in blind assembly of the chuck body 162, along path 214 as shown in FIG. 2. The chucking power supply 32 and a biasing power supply 30 are each coupled to the electrical coupler 230 via a lower male connector 233. The lower male connector 233 is a solid, generally cylindrical connector member having a generally conical or tapered distal end. In the preferred embodiment the lower male connector 233 is copper or beryllium copper.

Furthermore, the lower male connector 233 is inserted into a female counterpart at a lower end of the electrical coupler 230 along path 216 as shown by the arrows in FIG. 2. In this manner, RF biasing power from the biasing power supply 30 and DC chucking voltage from the chucking power supply 32 are supplied to the embedded electrode 73 via the electrical coupler 230.

FIG. 3A is a detailed elevated cross-sectional view of an electrical coupler 230 shown in FIG. 2. The electrical coupler 230 comprises an upper portion 232, a lower portion 235, an inner connector element 236, and an outer connector element 238 disposed over the length of the electrical coupler 230. The inner connector element 236 is a solid generally cylindrical central portion having a pair of bores at its opposed, i.e., upper and lower ends. The bores generally define integral, hollow and annular cylindrical portions 196a and 196b (collectively, hollow cylindrical portions 196). Inserted into each hollow cylindrical portion 196 are resilient connector portions, such as female banana connectors 199a and 199b (collectively, banana connectors 199). Each female banana connectors 199 may be pressed-fitted into one of the hollow cylindrical portions 196a and 196b. As such, the banana connectors 199 are in mechanical and electrical engagement with the hollow cylindrical portions 196 and inner connector element 236. Additionally, the inner connector element 236, hollow cylindrical portions 196a and 196b, and the female resilient banana connectors 199a and 199b, in the preferred embodiment are beryllium copper, and may be plated with an electrically conductive material to enhance RF current conduction. Such electrically conductive material may be chosen from the group consisting of silver, gold, and nickel. Alternatively, the RF current conduction plating material may be successive layers of nickel and gold.

The outer connector element 238 is an electrically non-conductive element and serves as an isolator for electrically insulating or isolating the inner connector

element 236 from the cooling plate 167 and for eliminating
air gaps and RF arcing therebetween. In one embodiment, the
outer connector element 238 is fabricated from silicone and
is molded about the entire length of the inner connector
5 element 236 so as to be in intimate contact with the outer
surface 236a of the inner connector element 236. Such
intimate contact prevents RF arcing between the conductive
inner connector element 236 and its surrounding environment.
Additionally, the outer connector element 238 may extend for
10 a length that circumscribes the annular cylindrical portion
196b at the lower portion 235 as well as the upper portion
232 of the electrical coupler 230. Accordingly, the
insertion of the upper and lower male connectors 231 and 233
into the female resilient banana connectors 199a and 199b at
15 the respective top and bottom of the electrical coupler 230,
thereby mechanically and electrically couple the electrode
73 to the power sources 30 and 32. In addition, the upper
male connector 231 and the cooling plate 167 provide a
thermal path such that the heat generated from the thermally
20 non-conductive stainless steel male connector 231 is
conducted to the cooling plate 167.

Referring to FIGS. 3A, 3B and 4, it will be further
understood that the electrical coupler 230 includes a flange
202 that is fabricated from a thermally conductive, yet
25 electrically insulative material such as a ceramic material.
Preferrably, the thermally conductive flange 202 is
fabricated from a material selected from the group
comprising aluminum nitride (AlN) and beryllium oxide (BeO₂).
The thermally conductive flange 202 circumscribes the
30 annular cylindrical portion 196a at the upper portion 232 of
the electrical coupler 230 and is attached e.g., by brazing
or other thermal bonding/coupling techniques.

FIG. 3B is a detailed view of the circled portion of
the electrical coupler 230 shown in FIG. 3A. The outer
35 connector element 238 is preferably molded over top 205 and
side 204 portions of the thermally conductive flange 202.
Notwithstanding a bottom portion 203 of the flange 202, the

inner connector 236, resilient banana connectors 199, hollow cylindrical portions 196, and thermally conductive flange 202 are encapsulated and electrically isolated by the outer connector element. Moreover, the bottom portion 203 of the thermally conductive flange 202 is in direct contact with the cooling plate 167.

FIG. 4 depicts a top view of the electrical coupler 230. In particular, FIG. 4 depicts the top flange portion 205 circumscribing the resilient banana connector 199a and the hollow cylindrical portion 196a. The thermally conductive flange 202 comprises a plurality of holes or bores 202a, 202b, and 202c that pass through the thermally conductive flange 202. These bores 202a, 202b, and 202c are used for receiving threaded bolts therethrough, such as representative threaded bolt 202d, shown in FIGS. 2 and 3B. This affords mechanical mounting of the upper portion 232 of the electrical coupler 230 to the cooling plate 167. More particularly, as shown in FIG. 2, the thermally conductive flange 202, and accordingly, the upper portion 232 of the electrical coupler 230 is mounted to the annular mounting surface 167c by the threading bolts 202d. The threading bolts 202d engage the corresponding threaded bores 202a-c extending inwardly into the mounting surface 167c. In this manner, the thermally conductive flange 202 is disposed above the mounting surface 167c and in contact with the annular cylindrical portion 196a. As such, the cooling plate 167 conducts heat from the upper male connector 231, as well as the upper portion 232 of the electrical coupler member 230, via the thermally conductive flange 202. Specifically, operating temperatures during wafer processing may reach approximately 300° Celsius (C) at the upper male connector 231. The thermally conductive flange 202 produces a thermal path from the upper male connector 231 to the cooling plate 167, where the temperature decreases to less than 150° C proximate the cooling plate 167. At temperatures less than 150° C, the silicone outer connector element 238, which is disposed over the length of the electrical coupler 230, is

not subjected to excessive temperatures that may cause the silicone to deteriorate. Thus, the silicone outer connector element 238 continues to protect the connector 230 from possibly forming a plasma in the inner connector element 5 236, as well as arcing with surrounding surfaces having voltage potentials less than that of the electrical coupler member 230.

Therefore, the addition of a thermally conductive flange 202 increases the conductivity of heat between the 10 chuck 220 and cooling plate 167 of the semiconductor wafer support 200. Specifically, heat is transferred through a thermal path from the upper male connector 231 coupled to the chuck body 162, through the banana connector 199a and hollow annular cylindrical portion 196a, through the 15 thermally conductive flange 202, and into the surface of the cooling plate 167. Accordingly, the electrical coupler 230, including the upper male connector 231, are only exposed to temperatures that are less than typical process operational temperatures caused by RF power conduction, plasma 20 environments, and the like.

It will be understood that while the present invention has been shown and described in the context of semiconductor wafer chucks including a single embedded electrode, the present invention is not so limited and is 25 equally applicable to semiconductor wafer chucks including more than one embedded electrode. Although various embodiments that incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other 30 varied embodiments that still incorporate these teachings.

005760-19229360

What is claimed is:

1. An electrical coupler, comprising:
 - an inner connector element having opposing ends;
 - an upper end connector and an lower end connector; each
 - 5 end connector respectively coupled to one of said opposing ends of said inner connector element;
 - a thermally conductive flange circumscribing said inner connector; and
 - an outer connector element disposed over said inner
 - 10 connector and said thermally conductive flange.
2. The electrical coupler of claim 1 wherein said opposing ends of said inner connector element each comprise a bore, in which the upper and lower end connectors are disposed.
- 15 3. The electrical coupler of claim 1 wherein said thermally conductive flange is brazed to said inner connector.
4. The electrical coupler of claim 1 wherein said thermally
- 20 conductive flange is fabricated from a ceramic material.
5. The electrical coupler of claim 1 wherein said thermally conductive flange is fabricated from the group comprising aluminum nitride and beryllium oxide.
- 25 6. The electrical coupler of claim 1 wherein said inner connector element is fabricated from beryllium copper.
7. The electrical coupler of claim 2 wherein said upper and
- 30 lower end connectors are fabricated from beryllium copper.
8. The electrical coupler of claim 7 said upper and lower end connectors are plated with at least one electrical conductor.
- 35 9. The electrical coupler of claim 8 wherein said upper and lower end connectors are plated with successive layers of

005760-138E9350

nickel and gold.

10. The electrical coupler of claim 2 wherein said upper and lower end connectors each comprise a female banana connector
5 disposed therein said bore.

11. The electrical coupler of claim 1 further comprising an upper male connector removably inserted into said upper end connector.
10

12. The electrical coupler of claim 11 wherein said upper male connector is fabricated from a thermally non-conductive material.

13. The electrical coupler of claim 12 wherein said upper male end connector is fabricated from stainless steel.
15

14. The electrical coupler of claim 12 wherein said upper male end connector is plated with at least one electrical
20 conductor.

15. The electrical coupler of claim 14 wherein said upper male end connector is plated with successive layers of nickel, copper, nickel, gold.
25

16. The electrical coupler of claim 1 further comprising a lower male connector removably inserted into said lower end connector.

17. The electrical coupler of claim 16 wherein said lower male connector is fabricated from beryllium copper.
30

18. The electrical coupler of claim 16 wherein said lower male connector is plated with at least one electrical
35 conductor.

19. The electrical coupler of claim 18 wherein said lower

005150-4989960

male connector is plated with successive layers of nickel and gold.

20. The electrical coupler of claim 1 wherein said outer
5 connector element is fabricated from silicone.

21. The electrical coupler of claim 1 wherein a portion of
said thermally conductive flange circumscribing said inner
connector is exposed from said outer connector element to
10 transfer heat to a surrounding environment.

22. A support assembly for supporting a semiconductor wafer,
comprising:

205T60" 4959960
15 a chuck body having at least one electrode embedded
therein; and

a cooling plate positioned beneath said chuck body; and
an electrical coupler positioned within said cooling plate
and having a thermally conductive flange circumscribing said
electrical coupler and disposed upon a surface of said
20 cooling plate.

23. The support assembly of claim 22 wherein said electrical
coupler electrically interconnects said at least one
electrode to chucking and biasing power sources for chucking
25 and biasing said semiconductor wafer.

24. The support assembly of claim 23 wherein said electrical
coupler further comprises:

30 an inner connector element having opposing ends;
an upper end connector and a lower end connector; each
end connector respectively coupled to one of said opposing
ends of said inner connector element;

a thermally conductive flange circumscribing said inner
connector; and

35 an outer connector element disposed over said inner
connector and said thermally conductive flange.

25. The support assembly of claim 24 wherein said opposing ends of said inner connector element each comprise a bore, in which the upper and lower end connectors are disposed.

5 26. The support assembly of claim 24 wherein said thermally conductive flange is brazed to said inner connector.

27. The support assembly of claim 24 wherein said thermally conductive flange is fabricated from a ceramic material.

10

28. The support assembly of claim 24 wherein said thermally conductive flange is fabricated from the group comprising aluminum nitride and beryllium oxide.

15 29. The support assembly of claim 24 wherein said inner connector element is fabricated from beryllium copper.

30. The support assembly of claim 25 wherein said upper and lower end connectors are fabricated from beryllium copper.

20

31. The support assembly of claim 30 said upper and lower end connectors are plated with at least one electrical conductor.

25 32. The support assembly of claim 31 wherein said upper and lower end connectors are plated with successive layers of nickel and gold.

30 33. The electrical coupler of claim 25 wherein said upper and lower end connectors each comprise a female banana connector disposed therein said bore.

34. The electrical coupler of claim 24 further comprising an upper male connector removably inserted into said upper end
35 connector.

35. The electrical coupler of claim 34 wherein said upper

005150-1932950

male connector is fabricated from a thermally non-conductive material.

36. The electrical coupler of claim 35 wherein said upper male end connector is fabricated from stainless steel.

37. The electrical coupler of claim 35 wherein said upper male end connector is plated with at least one electrical conductor.

38. The electrical coupler of claim 37 wherein said upper male end connector is plated with successive layers of nickel, copper, nickel, gold.

39. The electrical coupler of claim 24 further comprising a lower male connector removably inserted into said lower end connector.

40. The electrical coupler of claim 39 wherein said lower male connector is fabricated from beryllium copper.

41. The electrical coupler of claim 39 wherein said lower male connector is plated with at least one electrical conductor.

42. The electrical coupler of claim 41 wherein said lower male connector is plated with successive layers of nickel and gold.

43. The electrical coupler of claim 24 wherein said outer connector element is fabricated from silicone.

44. The electrical coupler of claim 24 wherein a portion of said thermally conductive flange circumscribing said inner connector is exposed from said outer connector element to transfer heat to a surrounding environment.

ABSTRACT OF THE INVENTION

An electrical coupler comprises an inner connector having upper and lower ends, an insulative outer connector element circumscribing the inner connector, and a thermally conductive flange disposed over the upper end of the inner connector and the outer connector for conducting heat from the electrical conductor. The electrical conductor may be utilized in a substrate support for semiconductor wafer processing. The substrate support comprises a chuck body having an electrode embedded therein, and an upper male connector coupled to the electrode and protruding from said chuck body. A cooling plate having the electrical coupler is positioned proximate to the chuck body. The upper male connector is inserted in the electrical coupler, and a power source coupled to the lower portion of the electrical coupler chucks and biases a wafer to an upper surface of said chuck. The thermally conductive flange conducts and transfers heat generated from the upper male connector and electrical coupler to the cooling plate.

20

2/4

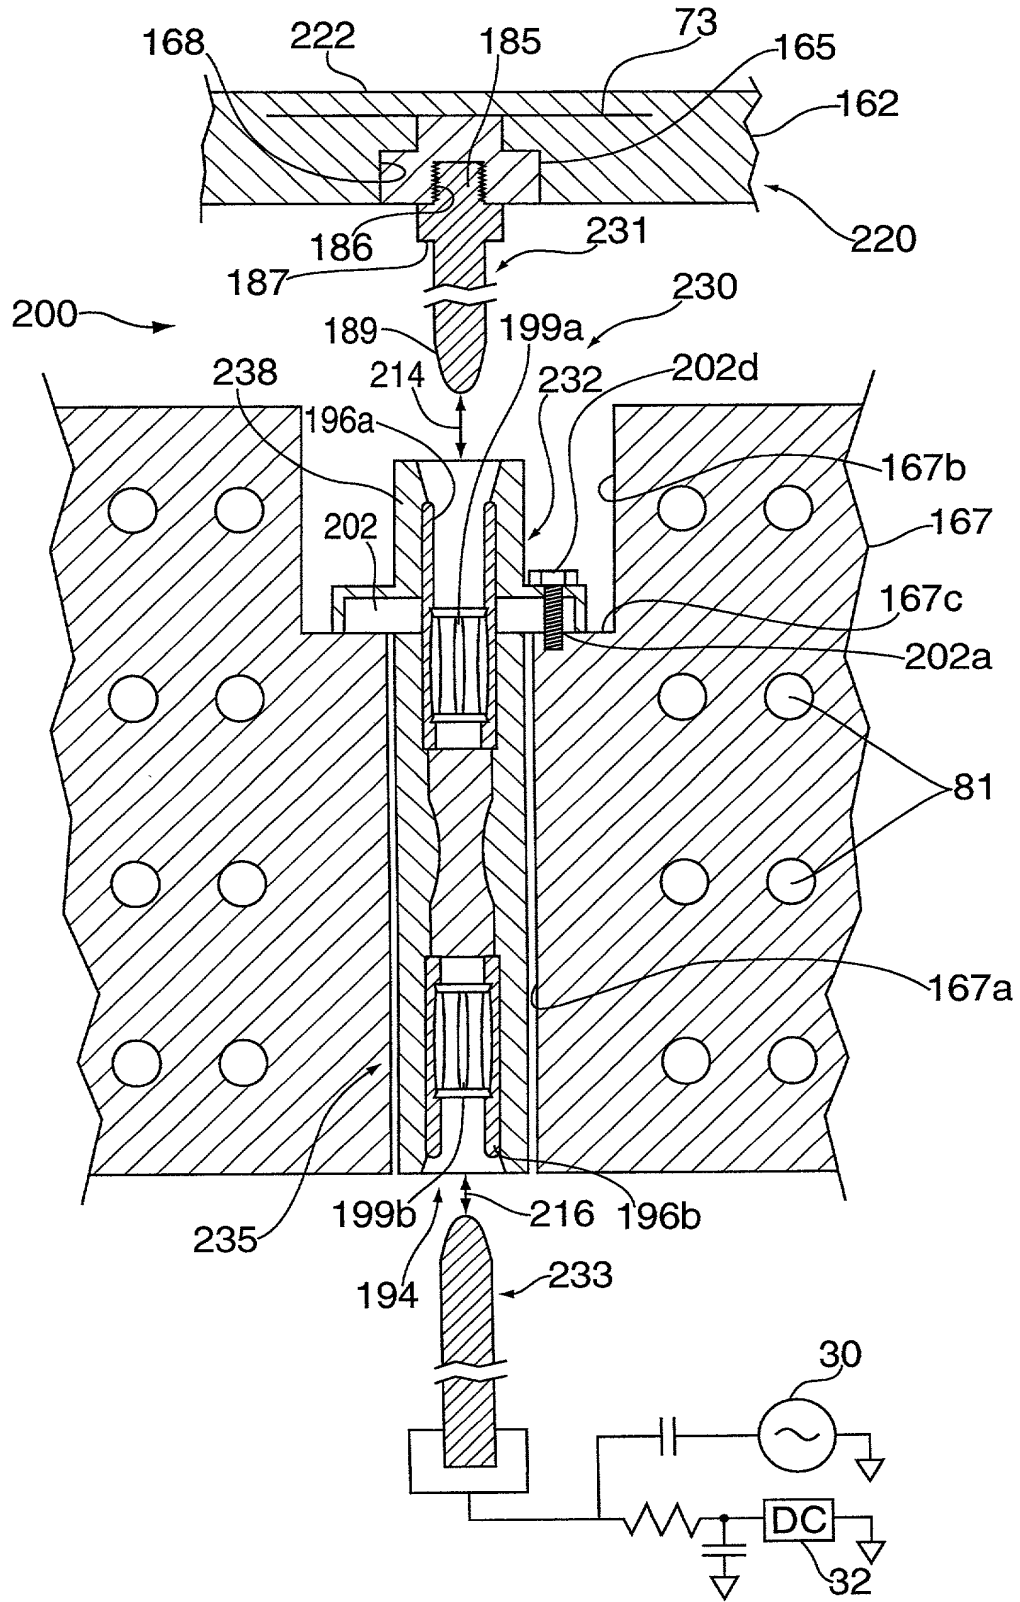


FIG. 2

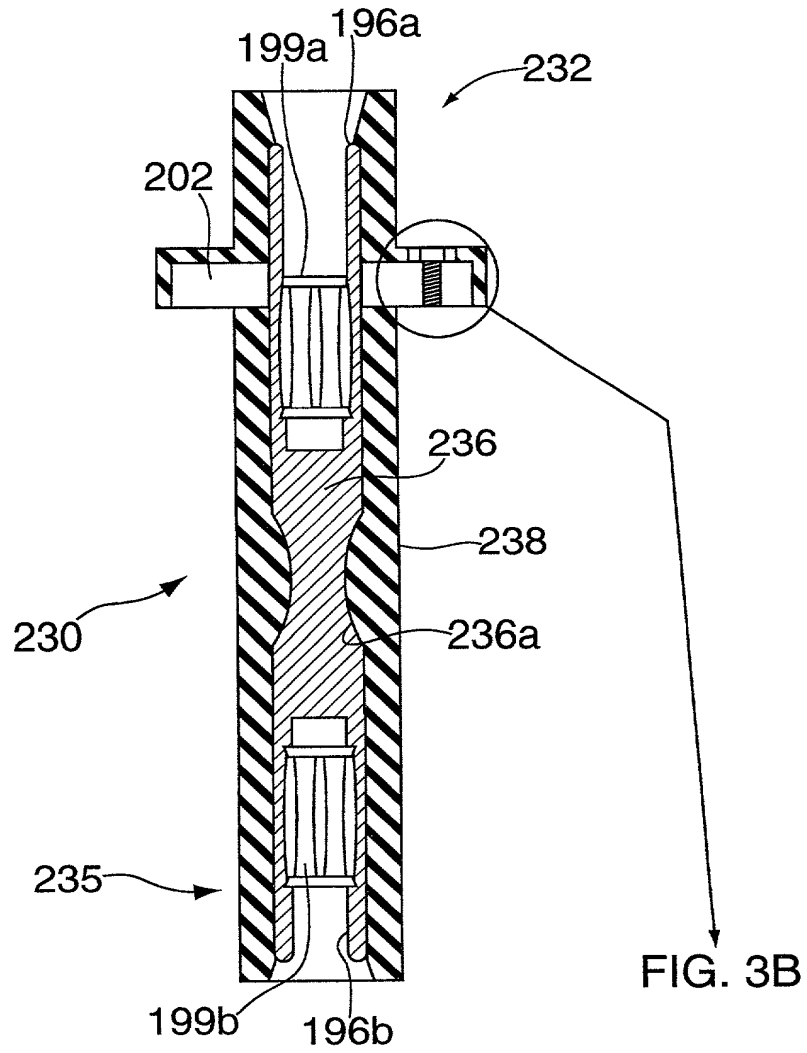


FIG. 3A

005150" 49822950

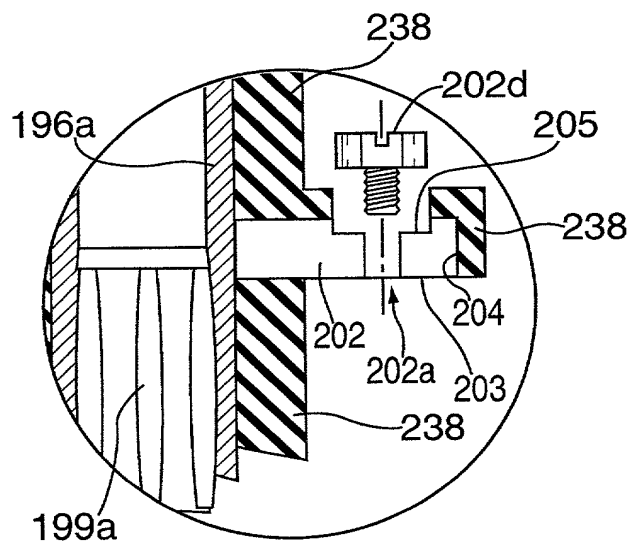


FIG. 3B

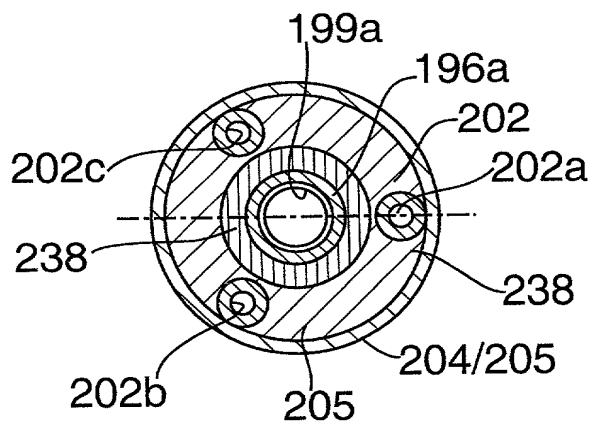


FIG. 4